

# MS25

## motor protection circuit breakers

Motor protection circuit breakers are special type of circuit breakers designed for protection of wide range of single-phase and three-phase ac motors against overload and short circuit. They are used in industry, small machines, agricultural machines, compressors etc.



### For motor protection

- ▶ All kind of AC induction motors
- ▶ For three-phase motors up to 22 kW

### Protection of other loads

- ▶ Various low-inductive loads
- ▶ Version with a thermal overload release for single-phase consumers MST20
- ▶ Version with thermal and magnetic release for single-phase consumers MS20
- ▶ Version for short-circuit protection MSZ25
- ▶ Version for transformer protection MS25TR

### Other Benefits

- ▶ Manual control:
  - START, STOP, push-buttons - Test of release function (TEST)
- ▶ Automatic switch-off at over-current with thermal or magnetic release
- ▶ Control with under-voltage release or shunt release
- ▶ An auxiliary switch for side mounting or flush mounting used for indication of the switching state
- ▶ Indication of release with trip indicating auxiliary switch
- ▶ ON/OFF buttons positions unequivocally indicates switching position of main contacts
- ▶ Contact material :
  - resistant to contact welding
  - enables low contact heating
- ▶ Isolating distance between contacts: 4.5 mm per contact place
- ▶ Connection of a rigid or flexible conductor
- ▶ Assembly to 35 mm wide mounting rail in compliance with EN 60715
- ▶ Vertical or horizontal operational position
- ▶ As required by IEC 60947-1, the manual motor starter features a trip-free mechanism. This means that the manual motor starter trips even if the handle is locked in the "ON" position or held by hand.



**MS25 characteristics**

Technical data	Symbol	Unit	MS25	MST25	MS20	MPE	MSZ25	MS25TR					
<b>General</b>													
Area of use			motor protection IEC/EN 60947-4-1, IEC/EN 60947-2, IEC/EN 60204, UL 60947, CSA 22.2 No. 14	single-phase consumer	single-phase AC motors with built-in thermal switch	short-circuit protection	transformer protection						
Standards				IEC/EN 60947-2, IEC/EN 60947-4-1	IEC/EN 60947-2, IEC/EN 60947-4-1	IEC/EN 60947-2	IEC/EN 60947-2						
Approvals			CE, UL, EAC	CE, EAC		CE							
Climatic class				Constant damp heat acc. to IEC 60068-2-78 Cyclic damp heat acc. to IEC 60068-2-30									
Degree of protection				IP20, after terminals covering IP40									
Mounting				35 mm DIN rail (EN 60715)									
Mounting position				any									
Ambient temperature		°C		-25 ... +60									
Storage temperature		°C		-25 ... +70									
Temperature range of thermal compensation		°C		-5 ... +40									
Maximum altitude (MSL)*		m		2000									
Mechanical endurance		op. c.		100.000									
Electrical endurance		op. c.	100.000 (AC-3), 20.000 (DC-5)	100.000 (AC-3)			20.000 (DC-5)						
Trip class acc. to IEC 60947-4-1				10A		/	10A						
Utilization category acc. to IEC 60947-4-1				AC-3, DC-5	AC-3		AC-3, DC-5						
Utilization category acc. to IEC 60947-2					A								
Max. switching frequency		op. c./h		25									
Shock resistance acc. to IEC 68-2-27		g		20									
Vibration resistance acc. to IEC 68-2-6		g		5 (at f= 5 ... 150 Hz)									
Overvoltage category				III									
Pollution degree				3									
Rated insulation voltage	U <sub>i</sub>	V	690	400	690	250	400	690					
Rated impulse withstand voltage	U <sub>imp</sub>	kV			6								
Weight		g		252									
<b>Main circuit</b>													
<b>Terminal capacity</b>													
rigid (solid and stranded)													
flexible													
S mm <sup>2</sup>													
flexible with end sleeve													
0.75 ... 4													
Conductor insulation stripping length		mm		10									
Screw				M3									
Screw type				PZ2, with self-lifting clamp protected from falling out									
Tightening torque		Nm		1.8									
Nominal current I <sub>n</sub> A													
0.16, 0.25, 0.4, 0.63, 1, 1.6, 2.5, 4, 6.3, 10, 16, 20, 25													
0.4, 0.63, 1, 1.6, 2.5, 4, 6.3, 10, 16, 20, 25													
0.16, 0.25, 0.4, 0.63, 1, 1.6, 2.5, 4, 6.3, 10, 16, 20, 25													
0.1-0.16, 0.16-0.25, 0.25-0.4, 0.4-0.63,													
0.25-0.4, 0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													
0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.5-4, 4-6.3,													

**MS25 characteristics**

Technical data	Symbol	Unit	MS25	MST25	MS20	MPE	MSZ25	MS25TR
<b>Main circuit</b>								
Max. motor current AC-3	A		25		20		/	
Max. motor current DC-5 (max. 250 V DC, all poles in series)	A		25		20	0.25		25
Number of all poles			3		1		3	
Number of protected poles			3		1		3	
Contact gap (per pole)	mm				9.5			
Release type	thermal-magnetic		thermal	thermal-magnetic		thermal	thermal-magnetic	
Operating current of thermal overload release			1.05 $I_r < I < 1.2 I_r$			/		1.05 $I_r < I < 1.2 I_r$
Operating current of magnetic release (fixed)			14 $I_h \pm 20\%$		14 $I_h \pm 20\%$		20 $I_h \pm 20\%$	
Sensitivity to phase failure			yes			/		yes
Power dissipation at $I_h$ (all poles)	W		6 ... 75		4 ... 5	2 ... 2.5	$\approx 0.5$	6 ... 7.5

Note: Above 2000 m voltages  $U_i$  and  $U_e$  are reduced by 2% for every 100 and current  $I_e$  by 2% for every 500 m

Maximum number of MPCBs mounted close together: 3

**MS25 motor protection switches**

**Rated ultimate and service short-circuit breaking capacity  $I$  and max. back-up fuses if short circuit current  $I$  exceeds  $I_{cu}$**

Type	Max. back-up fuse $U_e < 400 \text{ V } gL$ (A)
MST25 - 0.4	1
MST25 - 0.63	2
MST25 - 1	2
MST25 - 1.6	4
MST25 - 2.5	6
MST25 - 4	16
MST25 - 6.3	20
MST25 - 10	25
MST25 - 16	35
MST25 - 20	50
MST25 - 25	50
MST25 - 32	50

Type	Symbol	Unit	MS25	MST25	MS20	MPE	MSZ25	MS25TR
<b>Safety</b>								
MTTF - Mean time to failure $MTTF = 1/\lambda = B10/(0.1 n_{op})$		h			1666			
MTTF <sub>d</sub> - Mean time to failure dangerous $MTTF_d = 1/\lambda_d = B10_d/(0.1 n_{op})$		h			5000			
B10 - Number of operating cycles until 10 % of devices fail		op.			20.000			
B10 <sub>d</sub> - Number of operating cycles until 10 % of device dangerous $B10_d = B10/\text{ratio of dangerous failures}$		op.			60.000			
$\lambda$ - Failure rate $\lambda = (0.1 n_{op})/B10$		1/h			$6 \times 10^{-4}$			
$\lambda_d$ - Failure rate dangerous $\lambda_d = (0.1 n_{op})/B10_d$		1/h			$2 \times 10^{-4}$			
Ratio of dangerous failures		%			33			
$n_{op}$ - Operating cycles (operating cycles/h)		op./h			120			

**Switch selection for motor protection**

Single-phase	Standard motor powers						Settings range
	Three-phase						
220 V	220 V	380 V	400 V	440 V	550 V	660 V	
230 V	230 V					690 V	
240 V	240 V						
		kW					A
		0.02				0.06	0.1 ... 0.16
		0.06	0.06	0.06	0.06	0.09	0.16 ... 0.25
		0.06	0.09	0.12	0.12	0.18	0.25 ... 0.4
		0.09	0.12	0.18	0.25	0.25	0.4 ... 0.63
0.06 ... 0.09	0.09 ... 0.12	0.18 ... 0.25		0.25	0.37	0.37 ... 0.55	0.63 ... 1
0.12	0.18 ... 0.25	0.37 ... 0.55	0.37 ... 0.55		0.55 ... 0.8	0.75 ... 1.1	1 ... 1.6
0.18 ... 0.25	0.37	0.75 ... 1.1	0.75 ... 1.1	1.1		1.5	1.6 ... 2.5
0.37	0.55 ... 0.75	1.1 ... 1.5	1.5	1.5 ... 2.2		2.2 ... 3	2.5 ... 4
0.55 ... 0.75	1.1 ... 1.5	2.2 ... 2.5	2.2 ... 3	3		4	4 ... 6.3
1.1 ... 1.5	1.5 ... 2.5	3 ... 4	4 ... 5	4 ... 5.5		5.5 ... 7.5	6.3 ... 10
2.2	3 ... 4	5 ... 7.5	5.5 ... 9	7.5 ... 9	11		10 ... 16
3	5.5	9	11	11 ... 12.5	15		16 ... 20
	5.5 ... 7.5	11 ... 12.5	12.5	15	18.5		20 ... 25
	7.5	15	15	18.5	22		25 ... 32

**MS25 motor protection switches**

Rated ultimate and service short-circuit breaking capacity  $I_{cu}$  and  $I_{cs}$  and max. back-up fuses if short circuit current  $I_{cp}$  exceeds  $I_{cu}$

Type	Operating current of short-circuit release (A)	Rated ultimate short-circuit breaking capacity $I_{cu}$ , $I_{cs}$ (kA)				Max. back-up fuse, if $I_{cp} > I_{cu}$ (gL) (kA)			
		$I_{cu}$	$I_{cu}$	$I_{cu}$	$I_{cu}$	230 V	400 V	500 V	690 V
MS25 - 0.16	2.2	50	50	50	50				
MS25 - 0.25	3.5	50	50	50	50				
MS25 - 0.4	6	50	50	50	50				
MS25 - 0.63	9	50	50	50	50				
MS25 - 1	14	50	50	50	50				
MS25 - 1.6	23	50	50	50	50				
MS25 - 2.5	35	50	50	3	2.5		25	20	
MS25 - 4	56	50	50	3	2.5		35	25	
MS25 - 6.3	88	50	50	3	2.5		50	35	
MS25 - 10	140	50	6	3	2.5	80	50	35	
MS25 - 16	224	10	6	2.5	2	80	80	63	35
MS25 - 20	280	10	6	2.5	2	80	80	63	50
MS25 - 25	350	10	6	2.5	2	80	80	63	50
MS25 - 32	450	10	6	2.5	2	80	80	63	50

No back-up fuse required

**Motor protection circuit-breakers areas of use**

Type	Motor protection	Overload protection	Short-circuit protection	Single-phase consumers	Transformer protection
MS25	•	•	•	•	
MST25	•	•		•	
MS20	•	•	•	•	
MS25TR		•	•		•
MSZ25			•	•	
MPE				•	

**Motor protection circuit breakers MS25**

With overload and short-circuit release AC-3 acc. to IEC/EN 60947-4-1

Type	Setting range (A)	Motor power (3-phase, 400 V) (kW)	Ordering No.	Weight (g)	Packaging (pcs)
MS25-0.16	0.1 ... 0.16	0.02	30.107.955	252	1
MS25-0.25	0.16 ... 0.25	0.06	30.107.956	252	1
MS25-0.4	0.25 ... 0.4	0.09	30.107.957	252	1
MS25-0.63	0.4 ... 0.63	0.12	30.107.958	252	1
MS25-1	0.63 ... 1	0.18 ... 0.25	30.107.959	252	1
MS25-1.6	1 ... 1.6	0.37 ... 0.55	30.107.960	252	1
MS25-2.5	1.6 ... 2.5	0.75 ... 1.1	30.107.961	252	1
MS25-4	2.5 ... 4	1.1 ... 1.5	30.107.962	252	1
MS25-6.3	4 ... 6.3	2.2 ... 2.5	30.107.963	252	1
MS25-10	6.3 ... 10	3 ... 4	30.107.964	252	1
MS25-16	10 ... 16	5 ... 7.5	30.107.965	252	1
MS25-20	16 ... 20	9	30.107.966	252	1
MS25-25	20 ... 25	11 ... 12.5	30.107.967	252	1
MS25-32	25 ... 32	15	30.109.475	252	1


**Motor protection circuit breakers for single-phase consumers MS20**

With overload and short-circuit release, AC-3 acc. to IEC/EN 60947-4-1

Type	Setting range (A)	Motor power (single-phase, 220-240 V) (kW)	Ordering No.	Weight (g)	Packaging (pcs)
MS20-0.16	0.1 ... 0.16	-	30.108.523	252	1
MS20-0.25	0.16 ... 0.25	-	30.108.524	252	1
MS20-0.4	0.25 ... 0.4	-	30.108.525	252	1
MS20-0.63	0.4 ... 0.63	-	30.108.526	252	1
MS20-1	0.63 ... 1	0.06 ... 0.09	30.108.527	252	1
MS20-1.6	1 ... 1.6	0.12	30.108.528	252	1
MS20-2.5	1.6 ... 2.5	0.18 ... 0.25	30.108.529	252	1
MS20-4	2.5 ... 4	0.37	30.108.513	252	1
MS20-6.3	4 ... 6.3	0.55 ... 0.75	30.108.514	252	1
MS20-10	6.3 ... 10	1.1 ... 1.5	30.108.515	252	1
MS20-16	10 ... 16	2.2	30.108.516	252	1
MS20-20	16 ... 20	3	30.108.517	252	1


**Motor protection circuit breakers MST25**

With overload release, AC-3 acc. to IEC/EN 60947-4-1

Type	Setting range (A)	Motor power (3-phase, 400 V) (kW)	Ordering No.	Weight (g)	Packaging (pcs)
MST25-0.4	0.25 ... 0.4	0.09	30.108.240	252	1
MST25-0.63	0.4 ... 0.63	0.12	30.108.241	252	1
MST25-1	0.63 ... 1	0.18 ... 0.25	30.108.242	252	1
MST25-1.6	1 ... 1.6	0.37 ... 0.55	30.108.243	252	1
MST25-2.5	1.6 ... 2.5	0.75 ... 1.1	30.108.244	252	1
MST25-4	2.5 ... 4	1.1 ... 1.5	30.108.245	252	1
MST25-6.3	4 ... 6.3	2.2 ... 2.5	30.108.246	252	1
MST25-10	6.3 ... 10	3 ... 4	30.108.247	252	1
MST25-16	10 ... 16	5 ... 7.5	30.108.248	252	1
MST25-20	16 ... 20	9	30.108.249	252	1
MST25-25	20 ... 25	11 ... 12.5	30.108.250	252	1
MST25-32	25 ... 32	15	30.109.476	252	1



**Circuit breakers for thermistor-protected motors MPE**

With overload and short-circuit release, AC-3 acc. to IEC/EN 60947-4-1

Type	Setting range (A)	Motor power (3-phase, 400 V) (kW)	Ordering No.	Weight (g)	Packaging (pcs)
MPE	0.25	0.06	30.107.879	252	1


**Circuit breakers for short-circuit protection MSZ25 with short-circuit release**

Type	Setting range (A)	Motor power (3-phase, 400 V) (kW)	Ordering No.	Weight (g)	Packaging (pcs)
MSZ25-0.16	–	0.02	30.109.357	252	1
MSZ25-0.25	–	0.06	30.109.358	252	1


**Circuit breakers for transformer protection MS25TR**

With overload and short-circuit release, AC-6a acc. to IEC/EN 60947-4-1

Type	Setting range (A)	Ordering No.	Weight (g)	Packaging (pcs)
MS25TR-0.16	0.1 ... 0.16	30.109.477	252	1
MS25TR-0.25	0.16 ... 0.25	30.109.478	252	1
MS25TR-0.4	0.25 ... 0.4	30.109.479	252	1
MS25TR-0.63	0.4 ... 0.63	30.109.480	252	1
MS25TR-1	0.63 ... 1	30.109.481	252	1
MS25TR-1.6	1 ... 1.6	30.109.482	252	1
MS25TR-2.5	1.6 ... 2.5	30.109.368	252	1
MS25TR-4	2.5 ... 4	30.109.369	252	1
MS25TR-6.3	4 ... 6.3	30.109.370	252	1
MS25TR-10	6.3 ... 10	30.109.371	252	1
MS25TR-16	10 ... 16	30.109.372	252	1
MS25TR-20	16 ... 20	30.109.373	252	1
MS25TR-25	20 ... 25	30.109.374	252	1
MS25TR-32	25 ... 32	30.109.483	252	1



**Ordering data**

MS25	-	4		
		Setting range (A)		
		Type		

**Example:**


The same switch with under-voltage release for control voltage 380 V with an auxiliary switch with two NO contacts, built in the enclosure, with an emergency stop push-button and green signal lamp for 230 V: **MS25 - 4 / U 380 / PS 20 / O41 / NAT / SSz 230**

## Tripping characteristics

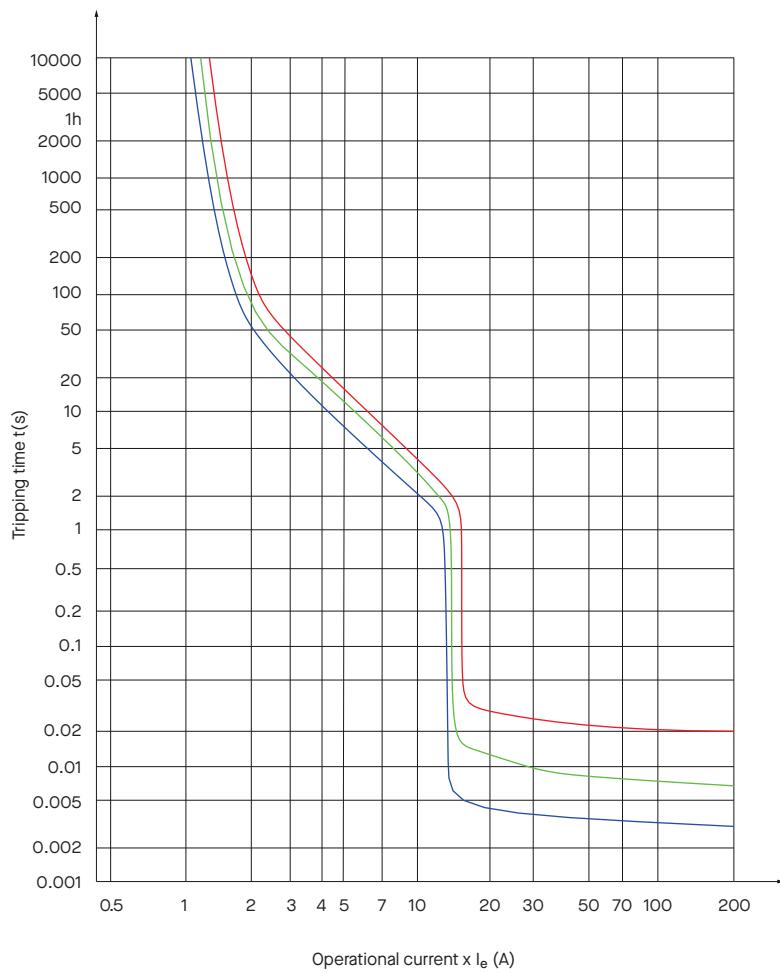

## Dimensions

(mm)

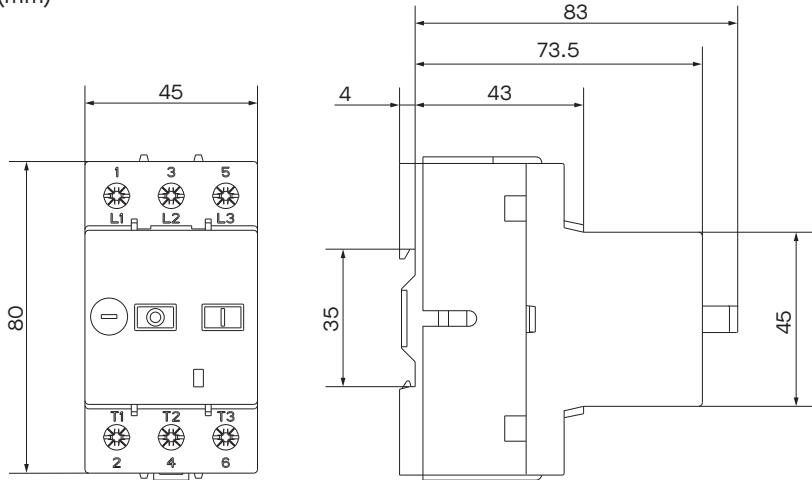

# Accessories for MS25

## Auxiliary switch for lateral mounting PS

Type	Symbol	Unit	PS
Standards	IEC 60947-5-1, UL 60947-5-1		
Approvals	CE, UL, EAC		
Rated impulse voltage	$U_{imp}$	kV	6
Rated insulation voltage	$U_i$	V	500
Thermal current	$I_{th}$	A	6
Rated operational current AC-15			
230 V	$I_e$		3.5
400 V	A		2
500 V			1.5
Mechanical endurance	op. c.		100.000
Terminal capacity	S	mm <sup>2</sup>	0.75 ... 2.5
Conductor insulation stripping length	mm		8
Screw type			
Screw head	PZ2		
Tightening torque	Nm		1

## Trip-indicating auxiliary switch RS

Type	Symbol	Unit	RS
Standards	IEC 60947-5-1, UL 60947-5-1		
Approvals	CE, UL, EAC		
Rated impulse voltage	$U_{imp}$	kV	6
Rated insulation voltage	$U_i$	V	500
Thermal current	$I_{th}$	A	6
Rated operational current AC-15			
230 V	$I_e$	A	1.5
400 V			1.5
500 V			1.5
Mechanical endurance	op. c.		100.000

## Under-voltage release U, Shunt release A

Type	Symbol	Unit	U, A
Standards	IEC 60947-5-1, UL 60947-5-1		
Approvals	CE, UL, EAC		
Control voltages (AC)	$U_c$	V	24, 48, 110, 120, 230, 400, 415, 480, 500, 600
Rated frequency	f	Hz	50/60
Pick-up voltage	$\times U_c$		≤ 0.85
Drop-out voltage			
Power consumption switch-on operation			
switch-on	VA/W		7.5 / 4.3
operation			3.8 / 1.3
Duty cycle	$t_{on}/t_{off}$	%	100
Noise level	dB		≤ 35
Mechanical and electrical endurance	op. c.		100.000

**Auxiliary contact block for lateral mounting PS**

Type	Number of contacts		Wiring diagram	Ordering No.	Weight (g)	Quantity / Box
	NO	NC				
PS01	0	1		38.901.670	35	1
PS10	1	0		38.901.669	35	1
PS11	1	1		38.901.501	35	1
PS20	2	0		38.901.500	35	1


**Under-voltage release U**


Voltage (V)*	Frequency (Hz)	Ordering No.	Weight (g)	Quantity / Box
24	50/60	38.901.502	62	1
24	60	38.901.952	62	1
48	50	38.901.904	62	1
48	60	38.902.956	62	1
60	50	38.901.504	62	1
110	50	38.901.505	62	1
120	60			
120	50	38.903.035	62	1
220 - 240	50	38.901.506	62	1
240	60			
380 - 415	50	38.901.508	62	1
440	60			
415	60	38.902.964	62	1
480	50	38.902.966	62	1
480	60	38.901.863	62	1
500	50	38.902.968	62	1
500	60	38.902.970	62	1
600	50	38.902.972	62	1
600	60	38.901.870	62	1



\* U release for other control voltage/frequencies are on request.

**Accessories for enclosures O-41/55 and CP-41/55**

Type	Voltage	Ordering No.	Weight (g)	Quantity / Box
Emergency stop push-button NAT	/	38.901.665	40	1
Emergency stop push-button with keylock NAT-K	/	38.902.488	40	1
Padlocking feature Z	/	38.901.632	95	1
Push-button diaphragm IP55	/	38.422.130	12	1
Neutral link NL	/	38.552.076	525	25
Signal lamp SSr (Red)	250 V	623.000.131		
	400 V	623.009.261	175	25
Signal lamp SSr (Green)	250 V	623.009.257		
	400 V	623.009.262	175	25
Signal lamp SSb (Transparent)	250 V	623.009.256		
	400 V	623.009.263	175	25
Cable inlet M25 x 1.5	/	315.609.520	15	100



**Shunt release A**

Voltage (V)*	Frequency (Hz)	Ordering No.	Weight (g)	Quantity / Box
24	50/60	38.901.510	62	1
24	60	38.901.953	62	1
48	50	38.901.905	62	1
48	60	38.902.957	62	1
60	50	38.901.504	62	1
110	50			
120	60	38.901.513	62	1
120	50	38.901.727	62	1
220 - 240	50			
240	60	38.901.514	62	1
380 - 415	50			
440	60	38.901.516	62	1
415	60	38.902.965	62	1
480	50	38.902.967	62	1
480	60	38.901.864	62	1
500	50	38.902.969	62	1
500	60	38.902.971	62	1
600	50	38.902.973	62	1
600	60	38.901.872	62	1



\* A releases for other control voltage/frequencies are on request.

**Trip-indicating auxiliary contact block RS**

Type	Number of contacts		Wiring diagram	Ordering No.	Weight (g)	Quantity / Box
	NO	NC				
RS01	0	1	51 --- 52	38.902.149	35	1
RS10	1	0	53 --- 54	38.902.150	35	1



Note: RS contact changes position from its normal state when the MS25 MPCB trips due to overload, short-circuit or the manual depression of the TEST lever.


**Adapters for connection of MS25 with a contactor**

Type	Conductor length (mm)	Conductor cross-section (mm²)	Thermal current (A)	Ordering No.	Weight (g)	Quantity / Box
DST-U-2.5	40	2.5	20	665.200.020	12	10
DST-U-4	40	4	35	665.200.021	16	10
DST-U-2.5 L	70	2.5	20	665.200.022	14	10


**Enclosures for MS25**






Type	Degree of protection	Ordering No.	Weight (g)	Quantity / Box
<b>Enclosures</b>				
O-41	IP41	38.422.509	222	1
O-55	IP55	38.422.510	222	1
<b>Front Plates</b>				
CP-41	IP41	38.422.035	150	1
CP-55	IP55	38.421.994	150	1

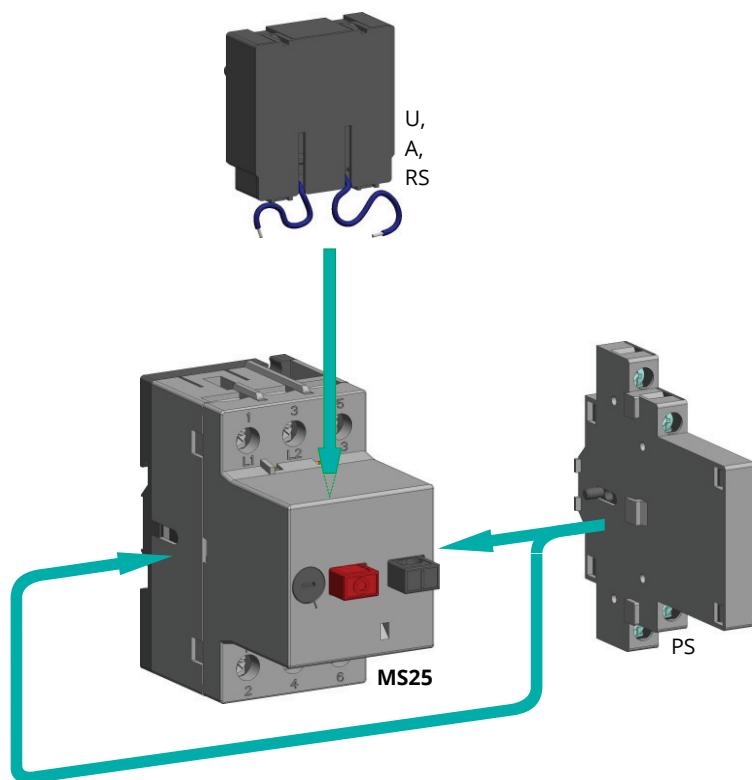

**Mounting positions of accessories**

**Dimensions**

(mm)

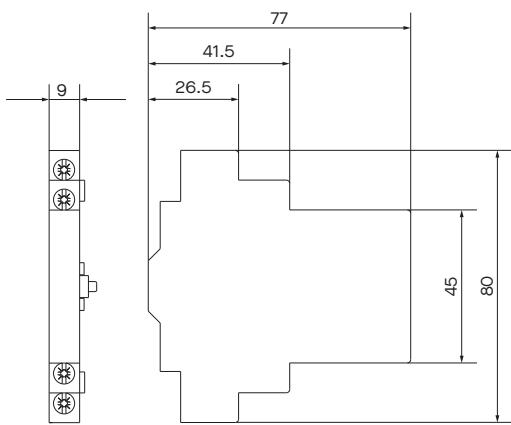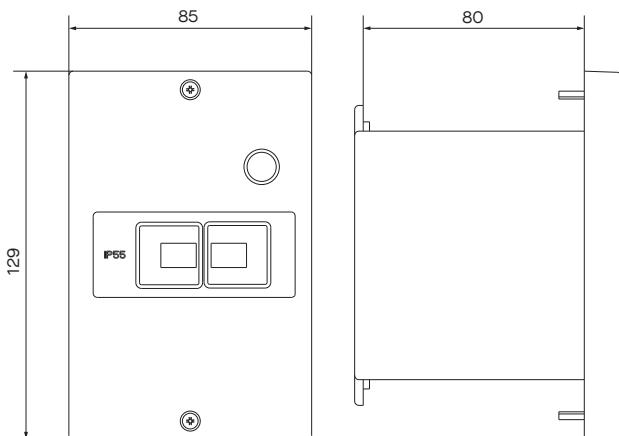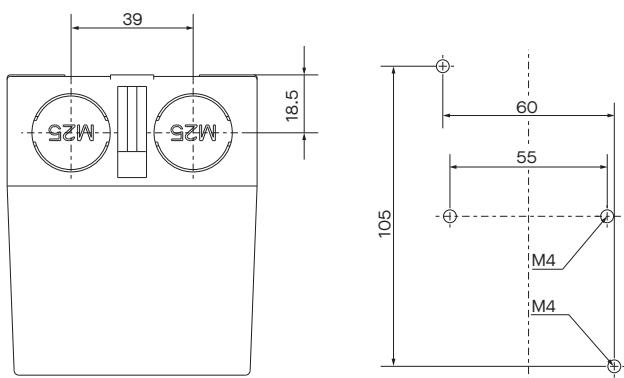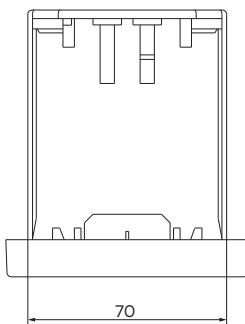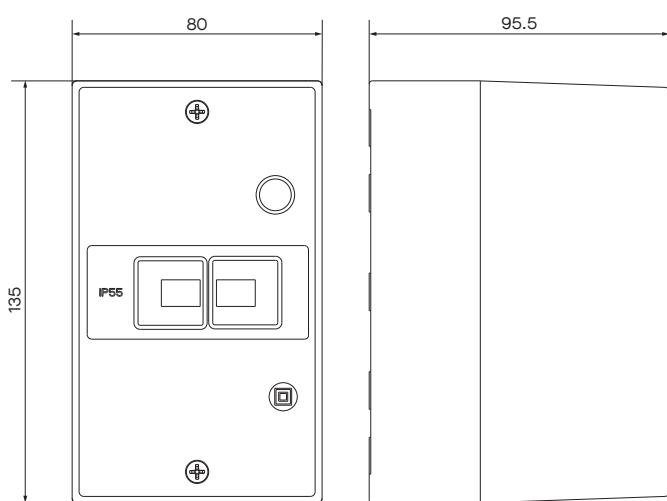**Auxiliary switch PS**

**CP-41/55**

**O-41/55**


# MS32

## motor protection circuit breakers

Motor protection circuit breakers are special type of circuit breakers designed for protection of wide range of single-phase and three-phase ac motors against overload and short circuit. They are used in industry, small machines, agricultural machines, compressors etc.

### For motor protection

- ▶ All kind of AC induction motors
- ▶ For three-phase motors up to 22 kW



### Protection of other loads

- ▶ Various low-inductive loads
- ▶ Version for transformer protection MS32TR

### Other Benefits

- ▶ Manual control:
  - START, STOP, push-buttons - with a trip indication (i.e. push-buttons stay in the middle position)
- ▶ Automatic switch-off at over-current with thermal or magnetic release
- ▶ Control with under-voltage release or shunt release
- ▶ An auxiliary switch for side mounting or flush mounting used for indication of the switching state
- ▶ Indication of release with trip indicating auxiliary switch
- ▶ ON/OFF buttons positions unequivocally indicates switching position of main contacts
- ▶ Contact material :
  - resistant to contact welding
  - enables low contact heating
- ▶ Isolating distance between contacts: 4.5 mm per contact place
- ▶ Connection of a rigid or flexible conductor
- ▶ Assembly to 35 mm wide mounting rail in compliance with EN 60715
- ▶ Vertical or horizontal operational position



**MS32 characteristics**

Technical data	Symbol	Unit	MS32
<b>General</b>			
Area of use			motor protection
Standards			IEC/EN 60947-2, IEC/EN 60947-4-1, IEC/EN 60204, UL 60947, CSA 22.2 No. 14
Approvals			CE, UL, CSA, EAC
Climatic class			Constant damp heat acc. to IEC 60068-2-78 Cyclic damp heat acc. to IEC 60068-2-30
Degree of protection			IP20, after terminals covering IP40
Mounting			35 mm DIN rail (EN 60715)
Mounting position			any
Ambient temperature		°C	-25 ... +60
Storage temperature		°C	-25 ... +70
Temperature range of thermal compensation		°C	-5 ... +40
Maximum altitude (MSL)*		m	2000
Mechanical endurance		op. c.	100,000
Electrical endurance		op. c.	100,000 (AC-3), 20,000 (DC-5)
Trip class acc. to IEC 60947-4-1			10
Utilization category acc. to IEC 60947-4-1			AC-3
Utilization category acc. to IEC 60947-2			A
Max. switching frequency		op. c./h	25
Shock resistance acc. to IEC 68-2-27		g	20
Vibration resistance acc. to IEC 68-2-6		g	5 (at f= 5 ... 150 Hz)
Overvoltage category			III
Pollution degree			3
Rated insulation voltage	U <sub>i</sub>	V	690
Rated impulse withstand voltage	U <sub>imp</sub>	kV	6
Weight		g	279
<b>Main circuit</b>			
<b>Terminal capacity</b>			
rigid (solid and stranded)	S	mm <sup>2</sup>	1 ... 10
flexible			1 ... 6
flexible with end sleeve			0.75 ... 6
Conductor insulation stripping length		mm	10
Screw			M3
Screw type			PZ2, with self-lifting clamp protected from falling out
Tightening torque		Nm	2.0
Nominal current	I <sub>n</sub>	A	0.16, 0.25, 0.4, 0.63, 1, 1.6, 2.5, 6.3, 10, 14, 18, 23, 27, 32
Current setting	I <sub>T</sub>	A	0.1-0.16, 0.16-0.25, 0.25-0.4, 0.4-0.63, 0.63-1, 1-1.6, 1.6-2.5, 2.4-4, 4-6.3, 6.3-10, 9-14, 13-18, 17-23, 20-27, 25-32
Nominal current range	I <sub>n</sub>	A	0.16 ... 32
Nominal frequency	f	Hz	50/60
Max. operational voltage	U <sub>e</sub>	V	690
Thermal current	I <sub>th</sub>	A	32
Max. motor current AC-3		A	32
Number of all poles			3
Number of protected poles			3
Contact gap (per pole)		mm	9.2
Release type			thermal-magnetic
Operating current of thermal overload release			1.05 I <sub>r</sub> < I < 1.2 I <sub>r</sub>
Operating current of magnetic release (fixed)			12 I <sub>n</sub> ± 20 %
Sensitivity to phase failure			yes
Power dissipation at I <sub>n</sub> (all poles)		W	6 ... 7.5

\* Above 2000 m voltages U<sub>i</sub> and U<sub>e</sub> are reduced by 2% for every 100 m and current I<sub>e</sub> by 2% for every 500 m.

**Motor protection circuit-breakers areas of use**

Type	Motor protection	Overload protection	Short-circuit protection	Single-phase consumers	Transformer protection
MS18	•	•	•	•	
MS32	•	•	•	•	
MS32TR		•	•		•

**MS32 characteristics**

Technical data	Symbol	Unit	MS32
<b>Safety</b>			
MTTF - Mean time to failure MTTF = $1/\lambda = B10/(0.1 n_{op})$		h	1666
MTTF <sub>d</sub> - Mean time to failure dangerous MTTF <sub>d</sub> = $1/\lambda = B10/(0.1 n_{op})$		h	5000
B10 - Number of operating cycles until 10 % of devices fail		op. c.	20.000
B10 - Number of operating cycles until 10 % of devices dangerous		op.c.	60.000
B10 <sub>d</sub> = B10/ratio of dangerous failures			
$\lambda$ - Failure rate $\lambda = (0.1 n_{op}) / B10$		1 / h	$6 \times 10$
$\lambda_d$ - Failure rate $\lambda_d = (0.1 n_{op}) / B10_d$		1 / h	$2 \times 10$
Ratio of dangerous failures		%	33
n <sub>op</sub> - Operating cycles (operating cycles/h)		op. c. / h	120

**Switch selection for motor protection**

Single-phase	Standard motor powers						Settings range	
	Three-phase							
	220 V 230 V 240 V	220 V 230 V 240 V	380 V 400 V 415 V	440 V	550 V	660 V 690 V		
				kW			A	
						0.06	0.1 ... 0.16	
				0.06	0.06	0.06 ... 0.9	0.16 ... 0.25	
				0.06	0.09	0.09 ... 0.12	0.25 ... 0.4	
				0.09	0.12 ... 0.18	0.18	0.4 ... 0.63	
0.06 ... 0.09	0.09 ... 0.12	0.18 ... 0.25	0.25 ... 0.37	0.25 ... 0.37	0.37 ... 0.55	0.63 ... 1		
0.12	0.18 ... 0.25	0.37 ... 0.55	0.37 ... 0.55	0.55 ... 0.75	0.75 ... 1.1	1 ... 1.6		
0.18 ... 0.25	0.37	0.75	0.75 ... 1.1	1.1	1.5	1.6 ... 2.5		
0.37	0.55 ... 0.75	1.1 ... 1.5	1.5	1.5 ... 2.2	2.2 ... 3	2.5 ... 4		
0.55 ... 0.75	1.1 ... 1.5	2.2	2.2 ... 3	2.2 ... 3	4	4 ... 6.3		
1.1 ... 1.5	1.5 ... 2.2	3 ... 4	4	4 ... 5.5	5.5 ... 7.5	6.3 ... 10		
2.2	2.2 ... 3	5.5	5.5 ... 7.5	5.5 ... 7.5	9 ... 11	9 ... 14		
3	4	7.5	7.5 ... 9	9 ... 11	15	13 ... 18		
	5.5	9 ... 11	11	11	15 ... 18.5	17 ... 23		
	5.5 ... 7.5	11	11	15	18.5 ... 22	20 ... 27		
	7.5	15	15	18.5	22	25 ... 32		

**MS32 motor protection switches**

Rated ultimate and service short-circuit breaking capacity  $I_{cu}$  and  $I_{cs}$  and  
max. back-up fuses if short circuit current  $I_{cp}$  exceeds  $I_{cu}$

Type	Operating current of short-circuit release (A)	Rated ultimate short-circuit breaking capacity $I_{cu}$ , $I_{cs}$ (kA)								Max. back-up fuse, if $I_{cp} > I_{cu}$ (gL) (kA)			
		230 V		400 V		500 V		690 V		230 V	400 V	500 V	690 V
		$I_{cu}$	$I_{cs}$	$I_{cu}$	$I_{cs}$	$I_{cu}$	$I_{cs}$	$I_{cu}$	$I_{cs}$				
MS32-0.16	2	100	100	100	100	100	100	100	100				
MS32-0.25	3	100	100	100	100	100	100	100	100				
MS32-0.4	5	100	100	100	100	100	100	100	100				
MS32-0.63	8	100	100	100	100	100	100	100	100				
MS32-1	13	100	100	100	100	100	100	100	100				
MS32-1.6	22	100	100	100	100	100	100	100	100				
MS32-2.5	33	100	100	100	100	100	100	5	5				16
MS32-4	55	100	100	100	100	100	100	3	3				25
MS32-6.3	75	100	100	100	100	6	4.5	3	2				35
MS32-10	126	100	100	100	100	6	4.5	3	2				50
MS32-14	170	25	12.5	25	12.5	6	4.5	3	2	80	63	50	50
MS32-18	230	25	12.5	25	12.5	6	4.5	3	2	80	63	50	50
MS32-23	270	25	12.5	25	12.5	4	3	3	2	80	63	50	50
MS32-27	360	25	12.5	25	12.5	4	3	3	2	80	63	50	50
MS32-32	400	25	12.5	25	12.5	4	3	3	2	80	63	50	50

No back-up fuse required

**MS32 characteristics**

Type	Setting range (A)	Motor power (3-phase, 400 V) (kW)	Ordering No.	Weight (g)	Quantity / Box
MS32-0.16	0.1 ... 0.16		30.108.757	279	1
MS32-0.25	0.16 ... 0.25	0.06	30.108.758	279	1
MS32-0.4	0.25 ... 0.4	0.09	30.108.759	279	1
MS32-0.63	0.4 ... 0.63	0.12 ... 0.18	30.108.760	279	1
MS32-1	0.63 ... 1	0.18 ... 0.25	30.108.761	279	1
MS32-1.6	1 ... 1.6	0.37 ... 0.55	30.108.762	279	1
MS32-2.5	1.6 ... 2.5	0.75	30.108.763	279	1
MS32-4	2.5 ... 4	1.1 ... 1.5	30.108.764	279	1
MS32-6.3	4 ... 6.3	2.2	30.108.765	279	1
MS32-10	6.3 ... 10	3 ... 4	30.108.766	279	1
MS32-14	9 ... 14	5.5	30.108.767	279	1
MS32-18	13 ... 18	7.5	30.108.768	279	1
MS32-23	17 ... 23	9 ... 11	30.108.769	279	1
MS32-27	23 ... 27	11	30.108.770	279	1
MS32-32	25 ... 32	15	30.108.771	279	1



**Circuit breakers for transformer protection MS32TR**

With overload and short-circuit release, AC-3 acc. to IEC/EN 60947-4-1

Type	Setting range (A)	Ordering No.	Weight (g)	Packaging (pcs)
MS32TR-2.5	1.6 ... 2.5	30.109.359	279	1
MS32TR-4	2.5 ... 4	30.109.360	279	1
MS32TR-6.3	4 ... 6.3	30.109.361	279	1
MS32TR-10	6.3 ... 10	30.109.362	279	1
MS32TR-14	9 ... 14	30.109.363	279	1
MS32TR-18	13 ... 18	30.109.364	279	1
MS32TR-23	17 ... 23	30.109.365	279	1
MS32TR-27	23 ... 27	30.109.366	279	1
MS32TR-32	25 ... 32	30.109.367	279	1


**Ordering data**


MS32 - 4

	Setting range (A)
	Type

**Example:**


The same switch with under-voltage release for control voltage 380 V with an auxiliary switch with two NO contacts, built in the enclosure, with an emergency stop push-button and green signal lamp for 230 V: **MS32 - 4 / UR 380 / HS 20 / H041 / NAT / SSz 230**

## Tripping characteristics

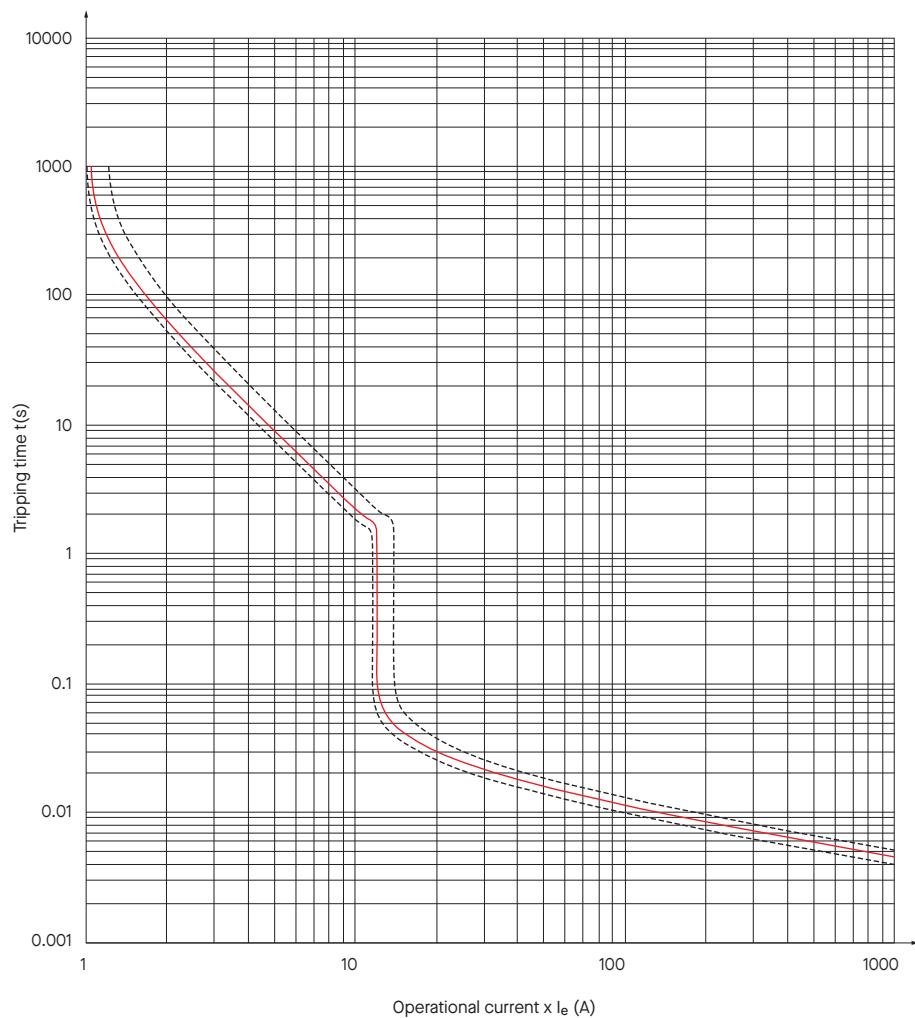

## Dimensions

(mm)

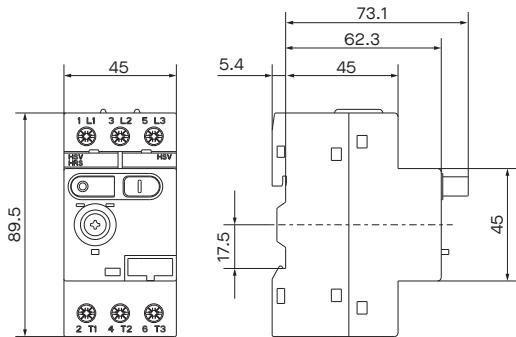

# Accessories for MS32

## Auxiliary contact block HSV

AC-15, DC-13 acc. to IEC/EN 60947-5-1

Type	Number of contacts		Wiring diagram	Ordering No.	Weight (g)	Quantity / Box
	NO	NC				
HSV10	1	0	13 --- 14	38.902.521	32	1
HSV01	0	1	21 --- 22	38.902.520	32	1



Note: HSV contact changes position from its normal state when the MS32 MPCB is switched on.

## Trip-indicating contact block HRS

AC-15, DC-13 acc. to IEC/EN 60947-5-1

Type	Number of contacts		Wiring diagram	Ordering No.	Weight (g)	Quantity / Box
	NO	NC				
HRS10	1	0	17 --- 18	38.902.523	32	1
HRS01	0	1	15 --- 16	38.902.522	32	1



Note: HRS contact changes position from its normal state when the MS32/MS18 MPCB trips due to overload, short-circuit or manual depression of the TEST lever.

## Auxiliary contact block for lateral mounting HS

AC-15, DC-13 acc. to IEC/EN 60947-5-1

Type	Number of contacts		Wiring diagram	Ordering No.	Weight (g)	Quantity / Box
	NO	NC				
HS10	1	0	33 --- 34	38.902.456	32	1
HS11	1	1	33 41 --- 34 42	38.902.458	32	1
HS20	2	0	33 43 --- 34 44	38.902.460	32	1



**Auxiliary switch for side mounting HS characteristics**

Type	Symbol	Unit	HS
Standards	IEC 60947-5-1, UL 60947-5-1		
Approvals	CE, UL, EAC		
Rated impulse voltage	$U_{imp}$	V	6 kV
Rated insulation voltage	$U_i$	V	500
Thermal current	$I_{th}$	A	5
Rated operational current AC-15 (240 V)	$I_e$	A	1.5
Rated operational current DC-13 (250 V)	$I_e$	A	0.1
Contact rating code designation for AC/DC	B300 / R300		
Mechanical endurance	op. c.		100.000
Electrical endurance	op. c.		100.000
Terminal capacity	S	mm <sup>2</sup>	0.75 ... 2.5
Conductor insulation stripping length	mm		
Screw type	M3.5		
Screw head	PZ2		
Tightening torque	Nm	1	

**Auxiliary contact block HSV and Trip indicating contact block HRS characteristics**

Type	Symbol	Unit	HSV, HRS
Standards	IEC 60947-5-1, UL 60947-5-1		
Approvals	CE, UL, EAC		
Rated impulse voltage	$U_{imp}$	V	6
Rated insulation voltage	$U_i$	V	300
Thermal current	$I_{th}$	A	1
Rated operational current AC-15 (240 V)	$I_e$	A	3
Rated operational current DC-13 (125 V)	$I_e$	A	0.22
Contact rating code designation for AC/DC	B300 / R300		
Mechanical endurance	op. c.		100.000
Electrical endurance	op. c.		100.000
Terminal capacity	S	mm <sup>2</sup>	0.75 ... 2.5
Conductor insulation stripping length	mm		
Screw type	M3.5		
Screw head	PZ2		
Tightening torque	Nm	0.6	

**Under-voltage release UR**

Voltage (V)*	Frequency (Hz)	Ordering No.	Weight (g)	Quantity / Box
24	50	38.902.534	62	1
24	60	38.902.535	62	1
110	50	38.902.941	62	1
110	60	38.902.536	62	1
230	50	38.902.461	62	1
230	60	38.902.943	62	1
240	50	38.902.524	62	1
240	60	38.902.537	62	1
400	50	38.902.634	62	1
400	60	38.902.947	62	1
415	50	38.902.533	62	1
415	60	38.902.949	62	1
480	50	38.902.951	62	1
480	60	38.902.538	62	1
500	50	38.902.952	62	1
500	60	38.902.939	62	1
600	50	38.902.954	62	1
600	60	38.902.539	62	1

\* UR release for other control voltage/frequencies are on request.


**Shunt release AR**

Voltage (V)*	Frequency (Hz)	Ordering No.	Weight (g)	Quantity / Box
24	50	38.902.574	62	1
24	60	38.902.575	62	1
110	50	38.902.940	62	1
110	60	38.902.576	62	1
230	50	38.902.462	62	1
230	60	38.902.942	62	1
240	50	38.902.525	62	1
240	60	38.902.944	62	1
400	50	38.902.945	62	1
400	60	38.902.946	62	1
415	50	38.902.573	62	1
415	60	38.902.948	62	1
480	50	38.902.950	62	1
480	60	38.902.578	62	1
500	50	38.902.579	62	1
500	60	38.902.938	62	1
600	50	38.902.953	62	1
600	60	38.902.955	62	1



\* AR release for other control voltage/frequencies are on request.

**Under-voltage release UR and Shunt release AR characteristics**

Type	Symbol	Unit	UR, AR
Standards	IEC 60947-5-1, UL 60947-5-1		
Approvals	U <sub>c</sub>	V	CE, UL, EAC
Control voltages (AC)	U <sub>c</sub>	V	24, 110, 230, 240, 400, 415, 480, 500, 600
Rated frequency	f	Hz	50 / 60
Pick-up voltage	x U <sub>c</sub>		< 0.85
Drop-out voltage			≤ 0.7
Power consumption switch-on operation	VA / W		switch-on: 7.9 / 3.9 operation: 3.3 / 0.9
Duty cycle	t <sub>ON</sub> / t <sub>OFF</sub>	%	100
Noise level		dB	≤ 35
Mechanical and electrical endurance		op.	min. 10.000
Terminal capacity		mm <sup>2</sup>	0.75 ... 2.5
Conductor insulation stripping length		mm	11
Screw type			M3.5
Screw head			PZ2
Tightening torque		Nm	1

**Adapters for connection of MS32 with a contactor**

Type	Used for	Ordering No.	Weight (g)	Quantity / Box
MSK07	K07	30.018.211	10	10
MSKNL9	KNL9 ... KNL18	30.018.212	10	10
MSKNL22	KNL22 ... KNL30	30.018.213	10	10


**Connection blocks MSS-3L**

Type	Number of MPCB	Length (mm)	Ordering No.	Weight (g)	Quantity / Box
MSS-3L-M2-45	2	80	655.200.001	26	10
MSS-3L-M3-45	3	125	655.200.002	48	10
MSS-3L-M4-45	4	170	655.200.003	68	10
MSS-3L-M5-45	5	215	655.200.004	90	10
MSS-3L-M2 + Hi-45 + 9	2	90	655.200.005	30	10
MSS-3L-M3 + Hi-45 + 9	3	145	655.200.006	54	10
MSS-3L-M4 + Hi-45 + 9	4	200	655.200.007	78	10
MSS-3L-M5 + Hi-45 + 9	5	250	655.200.008	111	10


**MSS-3L-MX-45 connection blocks**

**MSS-3L-MX-45 + 9 connection blocks  
(for MPCB with side-mounted accessories)**

**Supply block (25 mm<sup>2</sup>)**

Type	Ordering No.	Weight (g)	Quantity / Box
ESB-S/V-MS	655.200.009	40	10


**Protection for connection cable**

Type	Ordering No.	Weight (g)	Quantity / Box
BS-MS 0	655.200.010	2	10




**Enclosures for MS32**

Type	Degree of protection	Ordering No.	Weight (g)	Quantity / Box
<b>Enclosures</b>				
HO-41	IP41	38.423.019	222	1
HO-55	IP55	38.423.020	222	1
<b>Frames</b>				
FP-41	IP41	38.423.111	158	1
FP-55	IP55	38.423.112	158	1
<b>Front Plates</b>				
P-41	IP41	37.425.102	200	1
P-55	IP55	38.423.137	200	1


**Accessories for enclosures HO-41/55, FP-41/55, P-41/55**

Type	Voltage	Ordering No.	Weight (g)	Quantity / Box
Emergency stop push-button E	/	38.902.528	40	1
Emergency stop push-button with keylock E-K	/	38.902.530	40	1
Padlocking feature HZ	/	38.423.095	95	1
Push-button diaphragm IP55	/	38.423.113	12	1
Neutral link NL	/	38.552.076	525	25
Signal lamp SSr (Red)	250 V 400 V	623.000.131 623.009.261	175	25
Signal lamp SSr (Green)	250 V 400 V	623.009.257 623.009.262	175	25
Signal lamp SSb (Transparent)	250 V 400 V	623.009.256 623.009.263	175	25
Cable inlet M25 x 1.5	/	315.609.520	15	100

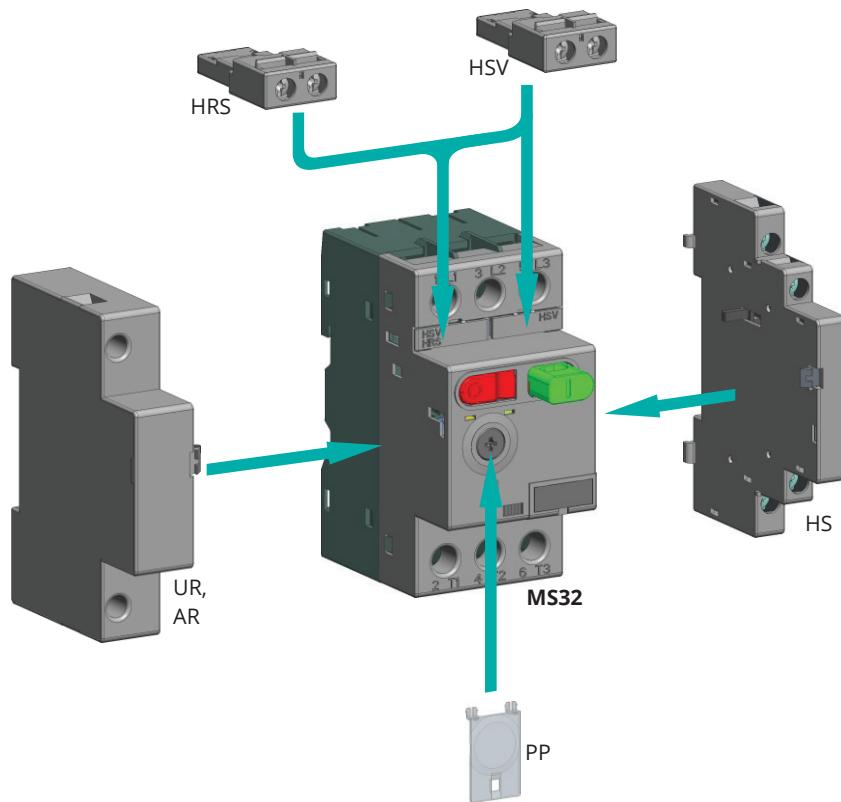


**Mounting positions of accessories**

## Connection blocks




MSK07, MSKNL9 and MSKNL22 adapters are used for connecting a motor protection switch with a contactor forming a single-unit starter for quick assembly to a 35 mm wide mounting rail (EN 60715)

- ▶ MSK07 - Adapter for connecting MS32 motor protection switch with K07 mini contactor
- ▶ MSKNL9 - Adapter for connecting MS32 motor protection switch with KNL9-KNL18 contactor
- ▶ MSKNL22 - Adapter for connecting MS32 motor protection switch with KNL22, KNL30 contactor

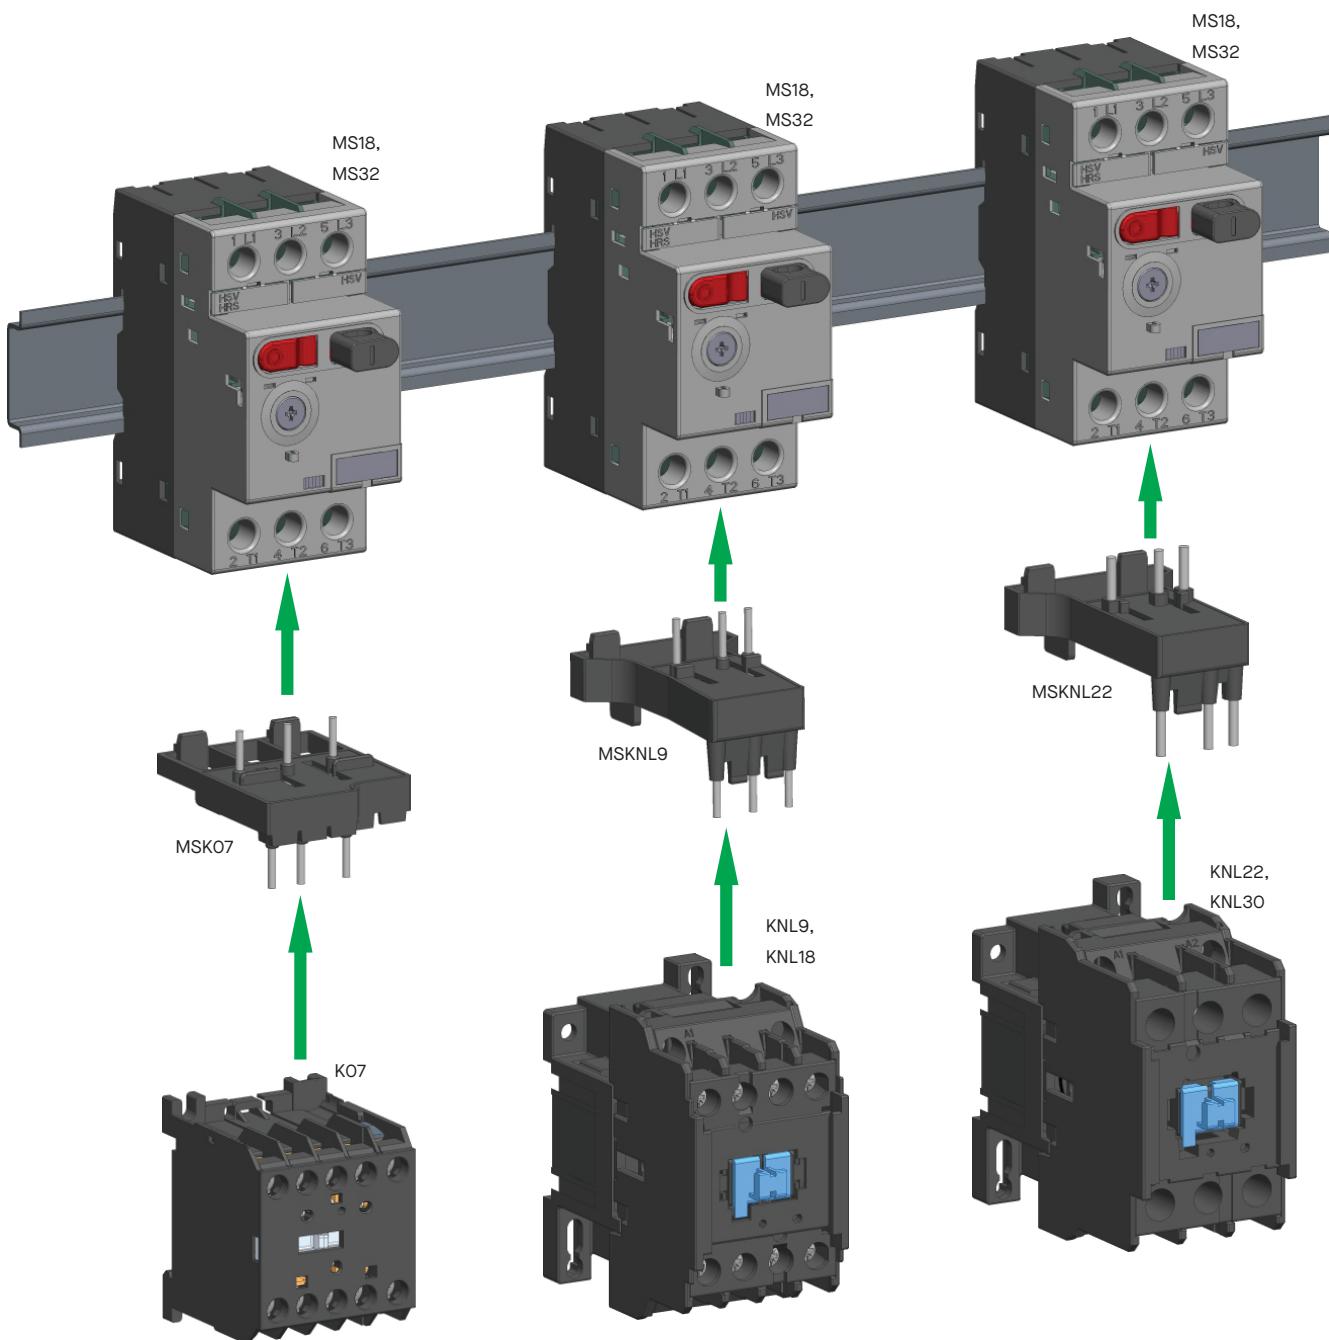

**Dimensions**

(mm)

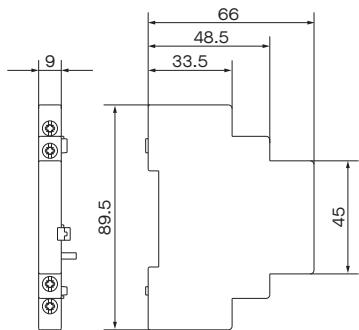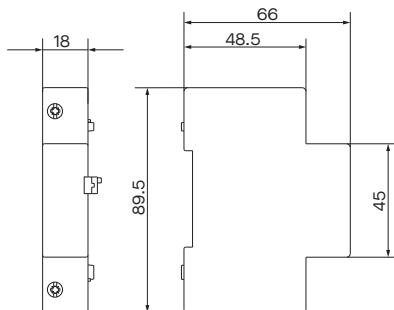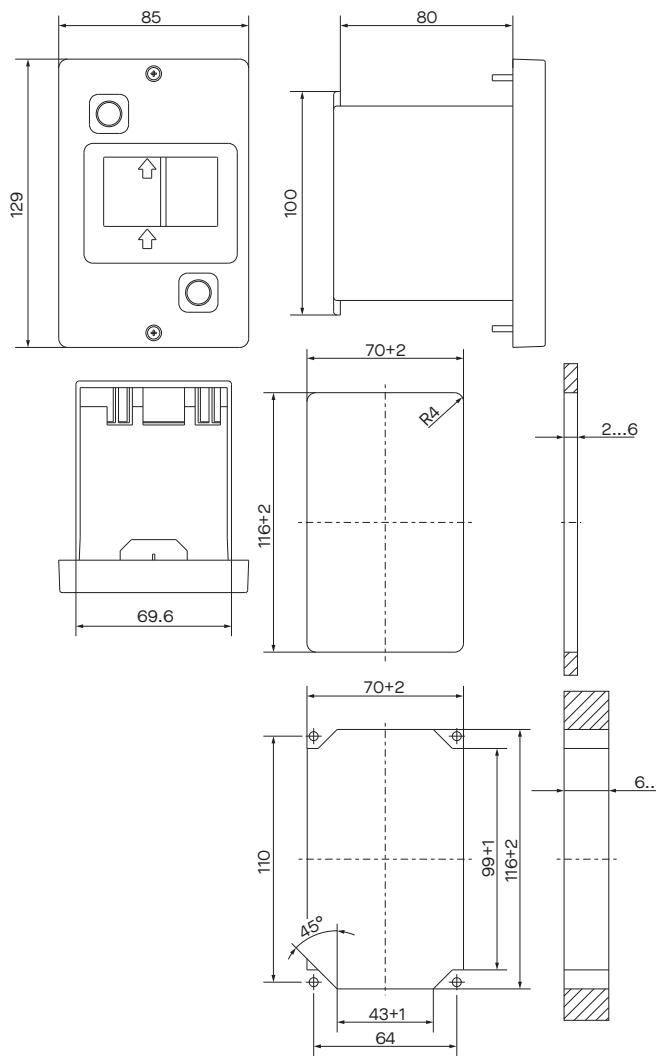**Auxiliary switch HS**

**Under-voltage release UR  
Shunt release AR**

**FP-41/55**

**HO-41/55**
